



SE24HCSXG

Single Glass Door Refrigerator

WIDTH ¹	DEPTH ²	HEIGHT ⁵	COLD SPACE™	ENERGY VOLUME	COOLING CAPACITY	ELECTRICAL ⁷	SHIPPING WEIGHT
23 7/8" 607 mm	31" ³ 788 mm	78" 1982 mm	24	19.4 cu. ft. 548.2 L	1/4 HP	115V / 60Hz / 2.7A	258 lbs. 118 kg.

¹ Add 19mm (3/4") for casters. ² Add 26mm (1") for power cord. ³ Add 40mm (1/2") for door handle. ⁵ Add 121mm (4 3/4") for casters. ⁷ Commercial refrigerators and freezers are designed for maximum duty and require dedicated 15 amp electrical circuits to maintain warranty.

SE24HCSXG: *Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.*

Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to operate at a set point between 34°F to 39°F (1°C - 4°C).
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear™ Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Corrosion resistant coated evaporator coil.
- Automatic, stainless steel condensate control system.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
- Equipped with ProcuTemp™ Energy Efficient Digital Controller featuring visual/audible product protection alarm.
- Controls refrigeration and displays according to simulated average product temperature to a display resolution of 1°C.

Cabinet:

- Exterior – stainless steel front and sides.
- White Interior with coved corners stands up to rigours of everyday wear and tear.
- Ergonomic raised interior floor.
- Space Saving Design – air ventilation exclusively from the front of unit.
- Insulation – cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.
- 5" Swivel Caster Kit Included.

Doors:

- Self Closing Swing Door features hold-open position, spring back protection and are reversible on-location.
- Low E-Door Glass
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Optional reversible door lock on-location available.

Lighting:


- LED Interior lighting with switch.

Storage:

- Three (3) white coated shelves 19 1/2"W x 22 3/4"D (496mm x 578mm) are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.
- Interior accepts typical 18" x 26" (458mm x 661mm) sheet pans.
- NSF-7 compliant for storage and display of open food product.

Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

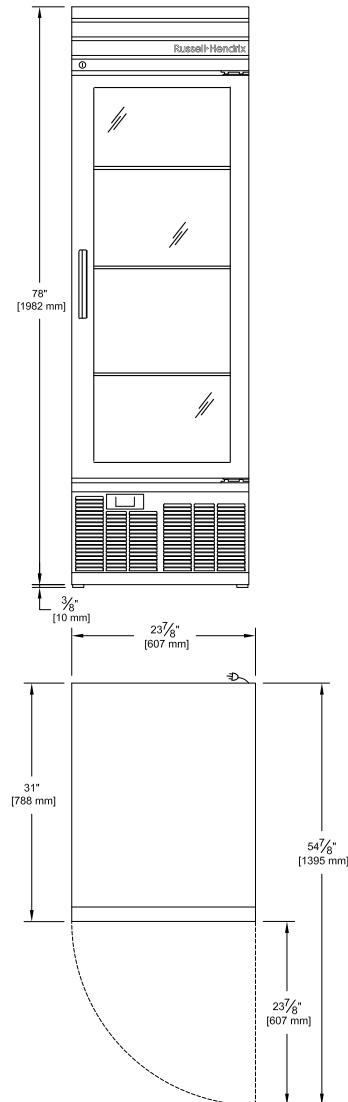

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
 Toll Free CAN: 1-800-387-5398 USA: 1-800-448-0244 Fax: 416-491-6982 www.habcomfg.com

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademarks of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol. DOMESTIC AND INTERNATIONAL PATENTS.